

VCL-2156, NTP TIME SERVER Primary Reference Clock (G.811)

Product Overview

The VCL-2156 NTP SERVER is designed to provide NTP and ITU-T G.811 Primary Reference Clock that is locked to a GPS / GNSS reference to provide time synchronization to private networks such as Railways and Metro networks, Airports and Air-Traffic Control facilities, Power Utilities, Oil and




Gas Utilities, ISPs and Cable TV networks as well as to Campus networks that are required to maintain a complete isolation from public networks for security reasons.

VCL-2156 locks to a GPS / GNSS reference to provide an NTP time reference on up to 4+1, 10/100BaseT Ethernet Ports which can be segregated to serve separate classes of assets in the network.

Features and Highlights:

- GPS / GNSS and NTP Input option*
- Functions as a Primary NTP Server
- Automatic failover to function as a
- secondary NTP Server, in the absence of GPS Signal
- High bandwidth NTP performance
- Upto 7,500 NTP requests per second
 - 40,000 NTP Slaves supported
 - 250,000 SNTP Slaves supported
- Multiple NTP Ports 4+1 x Independent 10/100 Mbit/s, RJ-45 Ethernet interface
- Parallel Redundancy Protocol (PRP) Switch - Optional
- ITU-T G.811 / Stratum 1 compliant (PR) Primary Reference when locked to GPS/GNSS
- ITU-T G.812 / Stratum 2 compliant holdover
- Synchronization of NTP / SNTP clients
- Supports Unicast, Multicast, Broadcast
- NTP Peering
- Leap Second correction Support
- MD5/SHA1 authentication Key
- Management for NTP clients
 1 x IRIG-B Un-Modulated (BNC)
- 1 x IRIG-B Un-Modulated (BN
 1 x IRIG-B Modulated (RJ45)
- Meets and comply with Power Contact and Lightening Protection as per EN61000-4-5 Level 3 specifications.
- Alert notifications via SNMP Traps, SNMPv2, SNMPv3, SMTP (Email)
- Concurrent IPv6 and IPv4 operation
- Supported network protocols: IPv4, IPv6, SSH, TELNET, FTP, SYSLOG, SCP, SFTP, TCP, UDP
- DHCP Support
- Supports Anti Jamming feature
- Supports Anti-Spoofing
- Secure network management: enable or disable options
- Double Oven Quartz Oscillators (OCXO) hold-over
- DC, or AC, or 1+1 Redundant AC+DC Power Supply options.

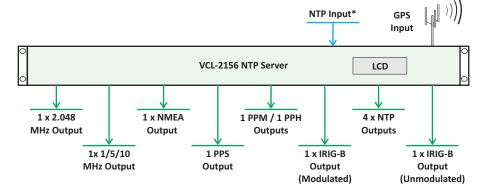

The VCL-2156 is equipped with a highly accurate, low-noise OCXO to provide a high stability, ITU-T G.812, Type II, III compliant holdover clock with better than 12µs accuracy over a 24 hour (5 milliseconds per year) period in the event of unavailability of the GPS / GNSS signal, or GPS / GNSS antenna failure, or a temporary loss of reception in a totally isolated network without any external reference.

VCL-2156 establishes a highly accurate phasesynchronized frequency and time base by synchronizing to the GPS / GNSS satellites' atomic clocks to distribute synchronized time over packet based networks including Ethernet, Carrier Ethernet, IP and IP/MPLS Networks.

In addition to functioning as a primary NTP server, the VCL-2156 may also be used as an intermediate NPT server in the event of the loss or the absence of the GPS input. This feature increases the reliability and resilience of the VCL-2156 NTP server, which in the event of losing its GPS signal, automatically becomes a secondary NTP server by synchronizing to another primary NTP time server located in the same network to acquire and to continue to dispense an accurate NTP time reference.

Display :

LCD-display with back-light (HH:MM:SS)
 - 12/24 Hour Mode

NTP Peering

NTP peering is a method to allow multiple NTP servers to share time. Having more than one reference server configured increases reliability of the NTP server.

In peering mode, in addition to its GPS reference, VCL-2156 can be configured to receive and monitor time from an additional Stratum 1 NTP Server available on the network. This allows the unit to fall back to its peer source in the event its primary reference becomes unavailable.

Performance:

The VCL-2156 has 4+1, 10/100 BaseT Industrial Ethernet Ports that meet and comply with "Power Contact and Lightening Protection" as per EN61000-4-5 Level 3 specifications making it suitable for the equipment to be installed in harsh industrial environments which include Electric Sub-Stations, Railway and Metro Networks.

VCL-2156 provides a better than 30 nanosecond accuracy to assure high bandwidth NTP Performance of better than 7,500 NTP requests per second (40,000 NTP Slaves supported).

Monitoring and Management:

The configuration can be managed by GUI. A text based and menu driven setup utility is also available via Telnet or SSH. An optional NMS allows multiple systems installed on a networks to be monitored and configured from a single or multiple management locations.

*The **NTP Input** supports only the Sub-Master clock feature, ensuring synchronized outputs from the four NTP server RJ45 ports, when the GPS/GNSS antenna is disconnected.

Technical Specifications:

GPS/GNSS Receiver Specifications:

- 50 Channel GPS Receiver
- 72 Channel GNSS Receiver
- GPS L1 frequency, C/A Code Receiver
- Tracks up to 12 satellites simultaneously
- Synchronizing Time:
- Acquisition time Hot Start: 1 sec.
 - Acquisition time Warm Start: 28 sec.
- Acquisition time Cold Start: 28 sec.
- GPS/GNSSSignal
 - Tracking and Navigation: -162 dBm
 - Reacquisition -160 dBm
 - Cold Start -148 dBm
- Antenna Connector: TNC
- Accuracy Of Time-Pulse Signal referenced to GPS: ± 30ns (raw)
- Accuracy Of Time-Pulse Signal referenced to GNSS: ± 20ns (raw)
- Accuracy Of Time-Pulse Signal referenced to GPS/GNSS: ± 15ns (compensated) (Note: with all satellites in view at -130db)

Synchronization Inputs:

- 1 x GPS / GNSS (TNC)
- NTP Time Source

Holdover (G.812) Synchronization:

- OCXO (Double Oven-Controlled Crystal Oscillator)
- Accuracy
 - 0.5ppb per day
 - 50ppb per year

NTP Outputs:

- 4 x 10/100Mbps NTP / SNTP Interfaces
- 1 x 10/100Mbps user configurable NTP / SNTP interface

Frequency and Time Outputs:

- 1 x 2.048 MHz, 75 Ohms, phase-locked to GPS / GNSS (BNC). ITU-T G.811 compliant.
- 1 x 10MHz, 50 Ohms, phase-locked to GPS / GNSS (BNC). ITU-T G.811 compliant.
- 1 x 1PPS, phase-locked to UTC (BNC)
- 1 x ToD (Time-Of-Day) output compliant to NMEA 0183 RS232C (DB9)
- 1 x IRIG-B Un-Modulated (BNC-50 Ohms) (B000, B002, B003, B004)
- 1 x IRIG-B Modulated (RJ45) (B120, B122, B123, B124)
- 1 x 1 PPM / 1 PPH Programmable
- 1 x Potential Free Contact

MTBF:

- Per MIL-HDBK-217F: ≥ 37 years @ 24C
- Per Telcordia SSR 332, Issue 1: ≥ 42 years @ 24C

Security and Protection:

- Password Protection with password strength monitor
- SSH

U.K.

Valiant Communications (UK) Ltd Central House Rear Office 124 High Street, Hampton Hill, Middlesex, TW12 1NS, U.K. **E-mail:** gb@valiantcom.com

www.valiantcom.com

Network Time Protocol:

- NTP v2, (RFC 1119), NTP v3 (RFC 1305), NTP v4, (RFC 5905), SNTP v3 (RFC 1769), SNTP v4 (RFP 2030), MD5 Authentication
- Upto 7,500 NTP requests per second
 - 40,000 NTP Slaves supported
 250,000 SNTP Slaves supported
- Internet Protocol: IPv4/IPv6
- NTP version 4.2.8p7
- Time Protocol: TIME (RFC 868)
- Davtime Protocol: DAYTIME (RFC 867)
- Supports Unicast, Multicast and Broadcast
- NTP Peering

Local / Remote Management:

- RS-232C, USB
- 10/100BaseTEthernet RJ45
- 1 x External Alarm Relay Contact.
- Telnet / SSH (option to disable clear text communication to comply with NERC security requirements)
- CLI Control Interface (HyperTerminal or VT100)
- SNMPv2, SNMPv3 Traps (MIB provided)
- Syslog, HTTP, HTTPS, TCP, UDP, FTP, SCP, SFTP.

Security Features and Capabilities:

- MD5/SHA1 authentication for secured NTP access
- Key management for NTP clients
- Option to disable clear text (Telnet) for secure communication
- Supports Secure Shell (SSH) network protocol for encrypted communication
- Supports RADIUS server for secure authentication and access control
- Supports user-configurable Ethernet port protection
- Supports NTP Peering for creating a redundant NTP server
- Encrypted Password Control to access the device
- Password Strength Monitoring
- Alert notifications using secure SNMPv3 traps

Standards & Compliance:

U.S.A.

Valcomm Technologies Inc.

4000 Ponce de Leon Blvd.,

E-mail: us@valiantcom.com

Suite 470, Coral Gables,

FL 33146, U.S.A.

- IEC EMC Certified to EN 55022: CISPR 32, EN 55024:2005, IEC 61000-4-2, IEC 60255 / IEC 61000-4-6, IEC 61000-4-8, 61000-4-9, IEC 60255-22-6, IEC 60255-5:2000, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-18, IEC 61000-4-17, IEC 60950, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-30, IEC 61850-3, IEC 60068-2-40, IEC 60068-2-6, IEC 60068-2-27
- RoHS, CE 2001/95/EC, 2006/95/EC, EN60950-1, EN61000-6-2, EN61000-6-4
- FCC FCC Part 15 B Class A: Conducted Emission test on Power Line
- FCC Part 15 B Class A: Radiated Emission >1 GHz FCC, 6 GHz, on Power Line

Configuration and Monitoring Software:

- Telnet, SSH, CLI
- NMS GUI (Graphical User Interface) Runs on any PC operating on Windows 7, Windows 8 or Windows 10 OS.

VCL-2156, NTP Server

Mechanical Specifications:

- H x W x D: 44mm x 480 mm x 225 mm
- Weight: 2.3 Kg
 - 19", 21", 23" Rack mounting options

Environmental (Equipment):

Operational	-20C to +65C
Cold start	-10C
Storage	-40C to +85C
Humidity	95% non-condensing
Cooling	Convention Cooled.
	No cooling fans are required.

Power Supply:

- Dual Redundant
- 1+1 AC power (100 to 240V AC, 50/60 Hz, IEC C14 Inlet Connector)
- 1+1 DC 24V, 1+1 DC 48V
- 1+1 DC 110~220V
- AC or DC

•

•

.

Reverse Polarity Protection

Power Consumption:

• <15W at ambient (steady state 24°C)

Polarization: Right hand circular

Amplifier Gain: 40dB ± 4dB

VSWR: <2.0 Max, 1.0 Typical

Frequency Band: 1575.42 MHz ±10 MHz

Out of Band Rejection: ≥ -60dB @ ± 50MHz

Lightening Protection: According to

LMR400 (or equivalent) Cable Length - 30,

Up to 6 User selectable output modules (Add

any 4 output cards, in any combination

Up to 16 x IRIG-B Un-Modulated outputs

Up to 16 x IRIG-B Un-Modulated outputs

VCL-2156-NTP-yy

yy: AC or ACR or DC or

ACDC (1+0, 1+1, AC+DC)

Revision 6.0 – January 14, 2025

NTP Server

DCRor

Up to 8 x NMEA-0183 outputs (RJ45) Up to 16 x 1PPS outputs (BNC)

Operating temperature: -40C to +85C

off center (1575.42 MHz) frequency

EN61000-4-5 Level 3 (Optional).

Antenna Specifications:

Antenna Type: Active

50, 60 and 90 meters

Please specify in order)

(RS422, RS485, RS232)

Up to 4 x 1PPS outputs (ST)

Valiant Communications Limited

E-mail: mail@valiantcom.com

Technical specifications are subjects to changes without notice.

Ordering Information:

71/1, Shivaji Marg,

New Delhi - 110015,

Expansion Chassis

(BNC)

Part Number

Description

Power

INDIA

India